


DEMINERALIZERS

MIXED BED



Water demineralization equipment using mixed bed resins, for the production of high purity demineralized water in industrial applications.

- Bottle made of fiberglass reinforced polyester (PRFV)
- Non-regenerative equipment. Once the exchange capacity is exhausted, the resin charge must be replaced.
- Input/output connection: 1"
- Working pressure: 2.5 to 6 Bar
- Maximum temperature: 35°C

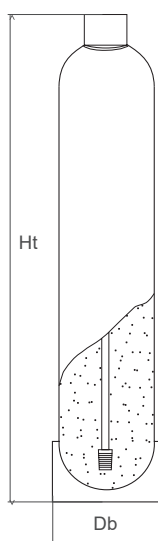

CODE	DIMENSIONS (mm)	
	Db	Ht
DI-1002-02	206	478
DI-1002-03	182	810
DI-1002-04	206	944
DI-1002-05	257	942
DI-1002-06	257	1432

CODE	LOAD	VOLUME (m ³)		
		20ppm	50ppm	100ppm
DI-1002-02	10	15,0	6,0	3,0
DI-1002-03	15	22,5	9,0	4,5
DI-1002-04	25	37,5	15	7,5
DI-1002-05	35	52,5	21	10,5
DI-1002-06	50	75,0	30	15,0