




DIGITAL HW PVDF2 DOSING PUMP

Multifunction digital dosing pump: proportional volumetric by pulse counter, 0/4...20mA input, BATH function, timer, manual mode.

- Housing made of fiberglass-reinforced polypropylene. IP65 protection degree
- Pump head: PVDF
- Membrana: PTFE
- Display of operating mode and status information
- Automatic and manual calibration for maximum dosing accuracy
- 0/4...20mA input
- Bath function, ppm function, 1xn, 1n⁻¹, timed
- Injection and alarm LED indicator
- Tank level input, remote Start-Stop, flow sensor and alarm relay output
- Wall or tank mounting
- Includes standard installation kit with foot valve in PVDF-T
- Injection valve.
- PVC suction pipe; PE delivery pipe (4/6Ø)
- Ceramic ball valve
- Purga manual
- Working temperature: 0 to 45°C
- Electrical voltage: 100...240VAC 50/60 Hz
- Power consumption 18 W (max.)

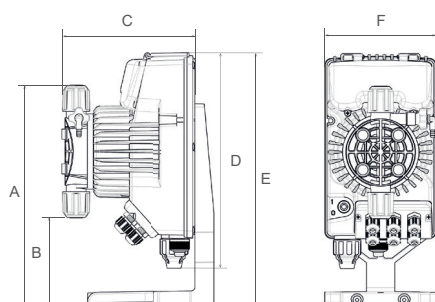

CODE	DIMENSIONS (mm)					
	A	B	C	D	AND	F
DO-2004-02	239,8	96,4	144,1	233,2	274,9	119
DO-2004-03	239,8	96,4	144,1	233,2	274,9	119

CODE	MODEL	FLOW	PRESSURE
DO-2004-02	PVDF2 DIGITAL 603	5 L/h	10 Bar
DO-2004-03	PVDF2 DIGITAL 600	3 L/h	18 Bar
DO-2004-50	Minimum level probe		
DO-2004-52	Level probe connector		
TU-0602-07	Tubing PE 6x4mm translucent (25 of 300m)		