

MAGNUM


AUTOTROL 2" SOFTENER

Automatic bibloc water softener for removing hardness using ion exchange resins.



MAGNUM 762 volumetric valve, digital programmer and delayed or instantaneous downflow regeneration.

- Vessel made of fiberglass reinforced polyester (PRFV)
- Regeneration by consumption average
- Forced regeneration from 1/2 to 99 days
- Turbine for controlling the volume of treated water
- 2" Connection
- Loaded with food grade resin of high capacity with high performance
- Working pressure: 2.5 to 6 Bar
- Maximum temperature: 40°C
- Power supply: 230V-12V 50Hz

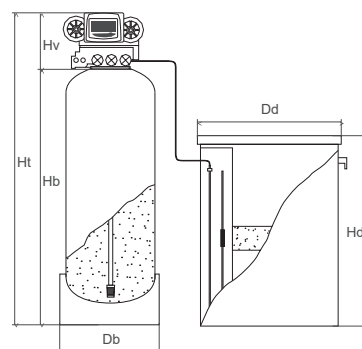

CODE	DIMENSIONS (mm)					
	Db	Hb	Hv	Ht	Dd	Hd
ED-0476-01	413	1671	272	1943	600	1140
ED-0476-02	413	1671	272	1943	600	1140
ED-0476-03	486	1722	272	1994	600	1140
ED-0476-04	486	1722	272	1994	905	1140
ED-0476-05	550	1722	272	1994	905	1140
ED-0476-06	626	1915	272	2187	905	1140
ED-0476-07	626	1915	272	2187	1200	1320
ED-0476-09	780	1836	272	2128	1200	1320
ED-0476-10	938	1856	272	2128	1200	1320
ED-0476-11	938	1856	272	2128	1560	1320

CODE	RESIN LOADING (L)	WORKING FLOW RATE (m³/h)	SALT CONSUMP. (Kg)	SALT TANK (L)
ED-0476-01	125	5,0	21,3	300
ED-0476-02	140	5,6	23,8	300
ED-0476-03	170	6,8	28,9	300
ED-0476-04	200	8,0	34,0	500
ED-0476-05	225	9,0	38,3	500
ED-0476-06	300	12,0	51,0	500
ED-0476-07	350	14,0	59,5	1000
ED-0476-09	500	14,0	85,0	1000
ED-0476-10	650	14,0	110,5	1000
ED-0476-11	750	14,0	127,5	1500

CODE	MODEL
AV-0221-06	Shut-off valve option
AV-0221-49	Kit micro Magnum

FT-EN-DESCAL MAGNUM-ED-0476-XX-FL25V01