




MAGNUM TWIN AUTOTROL 2" SOFTENER

Alternating duplex softener for removing hardness using ion exchange resins.

MAGNUM 764 volumetric valve, digital programmer and instant downflow regeneration.

Permanently softened water, only one bottle in service, the second in regeneration phase or on stand-by.

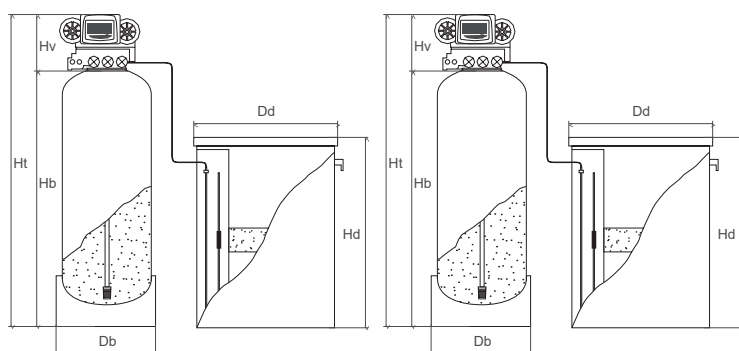

- Includes cutting piston for alternation in each bottle
- Vessel made of fiberglass reinforced polyester (PRFV)
- Regeneration by consumption average
- Forced regeneration from 1/2 to 99 days
- Turbine for controlling the volume of treated water
- 2" Connection
- Loaded with food grade resin of high capacity with high performance
- Working pressure: 2.5 to 6 Bar
- Maximum temperature: 40°C
- Power supply: 230V-12V 50Hz

CODE	DIMENSIONS (mm)					
	Db	Hb	Hv	Ht	Dd	Hd
ED-0603-01	413	1671	272	1943	600	1140
ED-0603-02	413	1671	272	1943	600	1140
ED-0603-03	486	1722	272	1994	600	1140
ED-0603-04	486	1722	272	1994	905	1140
ED-0603-05	550	1722	272	1994	905	1140
ED-0603-06	626	1915	272	2187	905	1140
ED-0603-07	626	1915	272	2187	1200	1320
ED-0603-09	780	1836	272	2108	1200	1320
ED-0603-10	938	1856	272	2128	1200	1320
ED-0603-11	938	1856	272	2128	1560	1170

CODE	RESIN LOADING (L)	WORKING FLOW RATE (m³/h)	SALT CONSUMP. (Kg)	SALT TANK (L)
ED-0603-01	2 x 125	5,0	21,3	2 x 300
ED-0603-02	2 x 140	5,6	23,8	2 x 300
ED-0603-03	2 x 170	6,8	28,9	2 x 300
ED-0603-04	2 x 200	8,0	34,0	2 x 500
ED-0603-05	2 x 225	9,0	38,3	2 x 500
ED-0603-06	2 x 300	12,0	51,0	2 x 500
ED-0603-07	2 x 350	14,0	59,5	2 x 1000
ED-0603-09	2 x 500	14,0	85,0	2 x 1000
ED-0603-10	2 x 650	14,0	110,5	2 x 1000
ED-0603-11	2 x 750	14,0	127,5	2 x 1500

CODE	MODEL
AV-0221-49	Kit micro Magnum

FT-EN-DESCAL MAGNUM TWIN-ED-0603-XX-FL25V01