

WS1Ci DF

CLACK 1" SOFTENER


Automatic bibloc water softener for removing hardness using ion exchange resins.

Clack WS1Ci DF volumetric valve, digital programmer and delayed, instantaneous or mixed downflow regeneration.

Its special design allows service flow rates of up to 6m³/h and optimal backwashing.



- Bottle made of fiberglass reinforced polyester (PRFV)
- Regeneration frequency from 1 to 28 days
- Integrated hardness mixer
- Turbine for controlling the volume of treated water
- 1" Connection
- Loaded with food grade resin of high capacity with high performance
- Working pressure: 2.5 to 6 Bar
- Maximum temperature: 43°C
- Power supply: 200~240V 50/60Hz 15Vdc

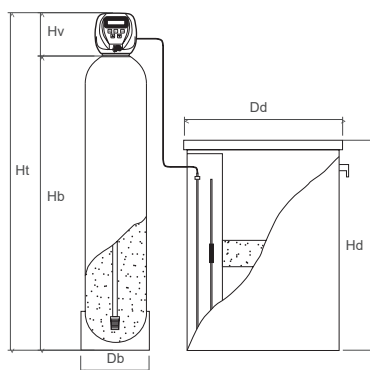

NWBP-1-1 shut-off valve ¼ " "

CODE	DIMENSIONS (mm)					
	Db	Hb	Hv	Ht	Dd	Hd
ED-3202-01	207	898	183	1081	445	680
ED-3202-02	258	896	183	1080	445	680
ED-3202-03	258	1126	183	1309	500	750
ED-3202-04	258	1386	183	1569	500	750
ED-3202-05	310	1232	183	1415	500	750
ED-3202-06	336	1393	183	1581	530	1000
ED-3202-07	363	1674	183	1857	530	1000
ED-3202-08	413	1671	183	1854	530	1000
ED-3202-09	413	1671	183	1854	600	1140
ED-3202-10	491	1722	183	1905	600	1140
ED-3202-11	491	1722	183	1905	600	1140
ED-3202-12	555	1721	183	1904	905	1140

CODE	RESIN LOADING (L)	WORKING FLOW RATE (m ³ /h)	SALT CONSUMP. (Kg)	SALT TANK (L)
ED-3202-01	20	0,8	4	100
ED-3202-02	30	1,2	6	100
ED-3202-03	40	1,6	8	150
ED-3202-04	50	2,0	10	150
ED-3202-05	60	2,4	12	150
ED-3202-06	80	3,2	16	200
ED-3202-07	100	4,0	20	200
ED-3202-08	125	5,0	25	200
ED-3202-09	140	5,6	28	300
ED-3202-10	170	6,0	34	300
ED-3202-11	200	6,0	40	300
ED-3202-12	225	6,0	45	500
CODE	MODEL			

VA-3002-12 NWBP-1-1 shut-off valve ¼ " "

FT-EN-DESCAL WS1CLDF-ED-3202-XX-FL25V01