

# WS1.25Ci DF

## CLACK 1" ¼ SOFTENER


Automatic bibloc water softener for removing hardness using ion exchange resins.



Clack WS1.25Ci DF volumetric valve, digital programmer and delayed, instantaneous or mixed downflow regeneration.



- GRP vessel reinforced in polyester
- Regeneration frequency from 1 to 28 days
- Integrated hardness mixer
- Turbine for controlling the volume of treated water
- 1 ¼" Connection
- Loaded with food grade resin of high capacity with high performance
- Working pressure: 2.5 to 6 Bar
- Maximum temperature: 43°C
- Power supply: 200~240V 50/60Hz 15Vdc

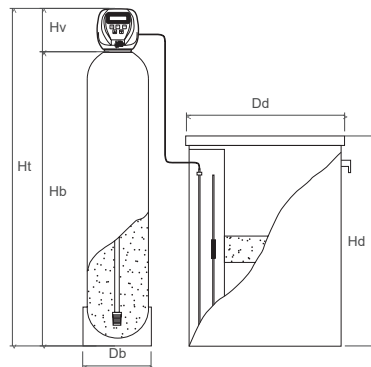

NWBP-1-1 shut-off valve ¼ "

| CODE       | DIMENSIONS (mm) |      |     |      |     |      |
|------------|-----------------|------|-----|------|-----|------|
|            | Db              | Hb   | Hv  | Ht   | Dd  | Hd   |
| ED-3203-06 | 336             | 1398 | 183 | 1581 | 530 | 1000 |
| ED-3203-07 | 363             | 1674 | 183 | 1857 | 530 | 1000 |
| ED-3203-08 | 413             | 1671 | 183 | 1854 | 530 | 1000 |
| ED-3203-09 | 413             | 1671 | 183 | 1854 | 600 | 1140 |
| ED-3203-10 | 491             | 1722 | 183 | 1905 | 600 | 1140 |
| ED-3203-11 | 491             | 1722 | 183 | 1905 | 600 | 1140 |
| ED-3203-12 | 555             | 1721 | 183 | 1904 | 905 | 1140 |

| CODE       | RESIN LOADING (L) | WORKING FLOW RATE (m³/h) | SALT CONSUMP. (Kg) | SALT TANK (L) |
|------------|-------------------|--------------------------|--------------------|---------------|
| ED-3203-06 | 80                | 3,2                      | 16                 | 200           |
| ED-3203-07 | 100               | 4,0                      | 20                 | 200           |
| ED-3203-08 | 125               | 5,0                      | 25                 | 200           |
| ED-3203-09 | 140               | 5,6                      | 28                 | 300           |
| ED-3203-10 | 170               | 6,8                      | 34                 | 300           |
| ED-3203-11 | 200               | 7,7                      | 40                 | 300           |
| ED-3203-12 | 225               | 7,7                      | 45                 | 500           |

| CODE       | MODEL                       |
|------------|-----------------------------|
| VA-3002-12 | NWBP-1-1 shut-off valve ¼ " |

FT-EN-DESCAL WS1.25CLDF-ED-3203-XX-FL25V01