

WS1.5Ci DF


CLACK 1" ½ SOFTENER

Automatic bibloc water softener for removing hardness using ion exchange resins.

Clack WS1.5Ci DF volumetric valve, digital programmer and delayed or instantaneous downflow regeneration.



- GRP vessel reinforced in polyester
- Regeneration frequency from 1 to 28 days
- External turbine for controlling the volume of treated water
- 1 ½" connection
- Loaded with food grade resin of high capacity with high performance
- Working pressure: 2.5 to 6 Bar
- Maximum temperature: 43°C
- Power supply: 200~240V 50/60Hz 15Vdc

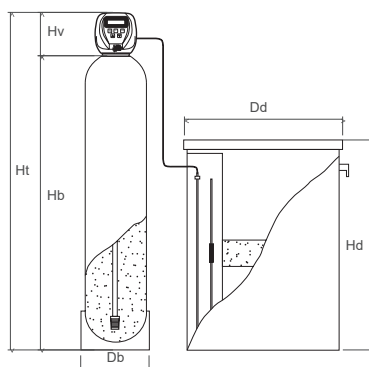

1" shut-off valve ½

CODE	DIMENSIONS (mm)					
	Db	Hb	Hv	Ht	Dd	Hd
ED-3204-07	363	1674	237	1911	530	1000
ED-3204-08	413	1671	237	1908	600	1140
ED-3204-09	413	1671	237	1908	600	1140
ED-3204-10	491	1722	237	1959	600	1140
ED-3204-11	491	1722	237	1959	905	1140
ED-3204-12	555	1721	237	1958	905	1140
ED-3204-13	635	1918	237	2155	905	1140
ED-3204-14	635	1918	237	2155	1200	1320

CODE	RESIN LOADING (L)	WORKING FLOW RATE (m³/h)	SALT CONSUMP. (Kg)	SALT TANK (L)
ED-3204-07	100	4,0	20	200
ED-3204-08	125	5,0	25	300
ED-3204-09	140	5,6	28	300
ED-3204-10	170	6,8	34	300
ED-3204-11	200	8,0	40	500
ED-3204-12	225	9,0	45	500
ED-3204-13	300	12,0	60	500
ED-3204-14	350	13,5	70	1000

CODE	MODEL
VA-3004-12	Shut-off valve 1 ½ "

FT-EN-DESCAL WS1.5CLDF-ED-3204-XX-FL25V01