

WS2Ci DF


CLACK 2" SOFTENER

Automatic bibloc water softener for removing hardness using ion exchange resins.

Clack WS2Ci DF volumetric valve, digital programmer and instantaneous, delayed or mixed downflow regeneration.



- GRP vessel reinforced in polyester
- Regeneration frequency from 1 to 28 days
- External turbine for controlling the volume of treated water
- 2" Connection
- Loaded with food grade resin of high capacity with high performance
- Working pressure: 2.5 to 6 Bar
- Maximum temperature: 43°C
- Power supply: 200~240V 50/60Hz 15Vdc

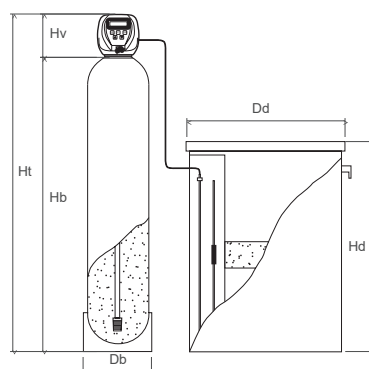

CODE	DIMENSIONS (mm)					
	Db	Hb	Hv	Ht	Dd	Hd
ED-3206-08	413	1671	216	1887	600	1140
ED-3206-09	413	1671	216	1887	600	1140
ED-3206-10	486	1722	216	1938	600	1140
ED-3206-11	486	1722	216	1938	905	1140
ED-3206-12	550	1721	216	1937	905	1140
ED-3206-13	626	1915	216	2132	905	1140
ED-3206-14	626	1915	216	2132	1200	1320
ED-3206-15	780	1836	216	2052	1200	1320
ED-3206-16	938	1856	216	2072	1560	1170

CODE	RESIN LOADING (L)	WORKING FLOW RATE (m³/h)	SALT CONSUMP. (Kg)	SALT TANK (L)
ED-3206-08	125	5,0	25	300
ED-3206-09	140	5,6	28	300
ED-3206-10	170	6,8	34	300
ED-3206-11	200	8,0	40	500
ED-3206-12	225	9,0	45	500
ED-3206-13	300	12,0	60	500
ED-3206-14	350	14,0	70	1000
ED-3206-15	500	20,0	100	1000
ED-3206-16	750	20,0	150	1500

CODE	MODEL
VA-3005-12	2" shut-off valve
AV-3402-04	Micro Auxiliary WS2

FT-EN-DESCAL WS2CLDF-ED-3206-XX-FL25V01