


WS2HF

CLACK 2" SOFTENER

Simplex, duplex, triplex softeners or series of up to 16 bottles for removing hardness using ion exchange resins.

Clack WS2HF volumetric valve, digital programmer and instantaneous, delayed or mixed downflow regeneration.

- Side mounted valve
- GRP vessel reinforced in polyester
- Regeneration frequency from 1 to 28 days
- External turbine for controlling the volume of treated water
- 2" Connection
- Alternating duplex systems: includes 1 alternating motorized valve (VA-3008-40)
- Triplex and higher systems: includes 1 shut-off valve per bottle (VA-3005-12)
- Loaded with food grade resin of high capacity with high performance
- Working pressure: 2.5 to 6 Bar
- Maximum temperature: 43°C
- Power supply: 230V-20Vac 50Hz

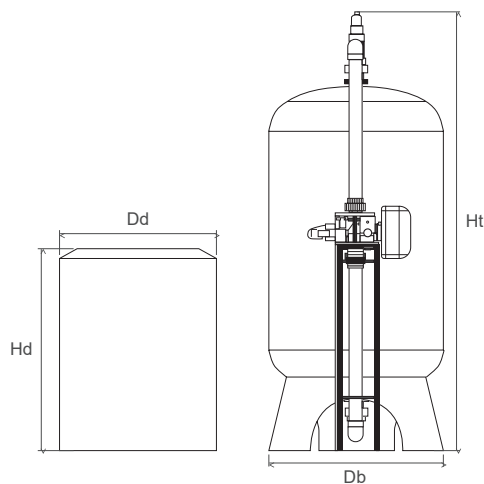

CODE	DIMENSIONS (mm)			
	Db	Ht	Dd	Hd
ED-3208-03	413	2640	1190	1425
ED-3208-05	938	2647	1510	1350
ED-3208-07	1089	2860	1570	1560
ED-3208-08	1233	2860	1570	1560
ED-3208-10	1625	2525	1850	1530

CODE	RESIN LOADING (L)	WORKING FLOW RATE (m³/h)	SALT CONSUMP. (Kg)	SALT TANK (L)
SIMPLEX BIBLOC WATER SOFTENERS				
ED-3208-03	500	20	100	1000
ED-3208-05	750	30	150	1500
ED-3208-07	1000	37	200	2000
ED-3208-08	1200	37	240	2000
ED-3208-10	1600	37	300	3000
DUPLEX WATER SOFTENERS				
ED-3608-03	2 x 500	20*	100	1000
ED-3608-05	2 x 750	30*	150	1500
ED-3608-07	2 x 1000	37*	200	2000
ED-3608-08	2 x 1200	37*	240	2000
ED-3608-10	2 x 1600	37*	300	3000
TRIPLEX WATER SOFTENERS				
ED-3808-03	3 x 500	20*	100	3 x 1000
ED-3808-05	3 x 750	30*	150	3 x 1500
ED-3808-07	3 x 1000	37*	200	3 x 2000
ED-3808-08	3 x 1200	37*	240	3 x 2000
ED-3808-10	3 x 1600	37*	300	3 x 3000

* Flow rate per bottle

CODE	MODEL
VA-3005-12	2" shut-off valve

FT-EN-DESCAL WS2H-ED-3X08-XX-FL25V01