

Clack®




WS3H CLACK 3" SOFTENER

Simplex, duplex and triplex softeners for removing hardness using ion exchange resins.

Clack WS3H volumetric valve, digital programmer and instantaneous, delayed or mixed downflow regeneration.

- Side mounted valve
- GRP vessel reinforced in polyester
- Regeneration frequency from 1 to 28 days
- External turbine for controlling the volume of treated water
- 3" Connection
- Alternating duplex systems: includes 1 alternating motorized valve (VA-3008-50)
- Triplex and higher systems: includes 1 shut-off valve per bottle (VA-3010-14)
- Loaded with food grade resin of high capacity with high performance
- Working pressure: 2.5 to 6 Bar
- Maximum temperature: 43°C
- Power supply: 230V-20Vac 50Hz

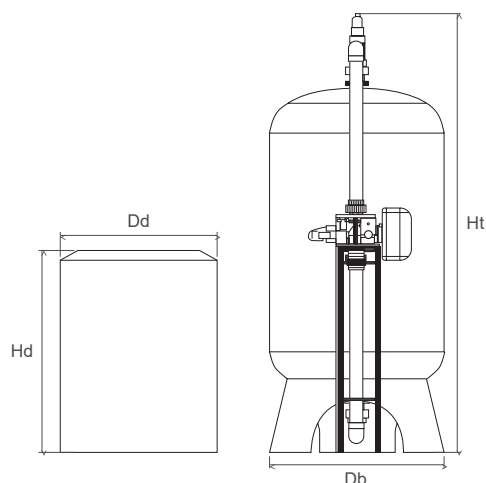

CODE	DIMENSIONS (mm)			
	Db	Ht	Dd	Hd
ED-3210-03	780	2460	1190	1425
ED-3210-05	938	2647	1510	1350
ED-3210-07	1089	2860	1570	1560
ED-3210-08	1233	2860	1570	1560
ED-3210-10	1625	2525	1850	1530
ED-3210-12	1625	2953	1850	1530

CODE	RESIN LOADING (L)	WORKING FLOW RATE (m³/h)	SALT CONSUMP. (Kg)	SALT TANK (L)
SIMPLEX BIBLOC WATER SOFTENERS				
ED-3210-03	500	20	100	1000
ED-3210-05	750	30	150	1500
ED-3210-07	1000	40	200	2000
ED-3210-08	1200	48	240	2000
ED-3210-10	1600	56	300	3000
ED-3210-12	2250	56	450	3000
DUPLEX WATER SOFTENERS				
ED-3610-03	2 x 500	20*	100	1000
ED-3610-05	2 x 750	30*	150	1500
ED-3610-07	2 x 1000	40*	200	2000
ED-3610-08	2 x 1200	48*	240	2000
ED-3610-10	2 x 1600	56*	300	3000
ED-3610-12	2 x 2250	56*	450	3000
TRIPLEX WATER SOFTENERS				
ED-3810-03	3 x 500	20*	100	3 x 1000
ED-3810-05	3 x 750	30*	150	3 x 1500
ED-3810-07	3 x 1000	40*	200	3 x 2000
ED-3810-08	3 x 1200	48*	240	3 x 2000
ED-3810-10	3 x 1600	56*	300	3 x 3000
ED-3810-12	3 x 2250	56*	450	3 x 3000

* Flow rate per bottle

CODE	MODEL
VA-3010-14	3" shut-off valve

FT-EN-DESCAL WS3H-ED-3X10-XX-FL25V01