

TWIN WS1TT DF

CLACK 1" SOFTENER


Twin alternating softener for removing hardness using ion exchange resins.

Clack WS1TT DF volumetric valve for control of the two bottles, digital programmer and delayed, instantaneous or mixed downflow regeneration.

Permanently softened water, only one bottle in service, the second in regeneration phase or on stand-by.



- Its special design allows service flows (up to 6 m³/h) and optimal backwashes
- GRP vessel reinforced in polyester
- Regeneration frequency from 1 to 28 days
- Turbine for controlling the volume of treated water
- Includes collector between bottles
- By-pass optional.
- 1" Connection
- Loaded with food grade resin of high capacity with high performance
- Working pressure: 2.5 to 6 Bar
- Maximum temperature: 43°C
- Power supply: 230V-15Vdc 50/60 Hz

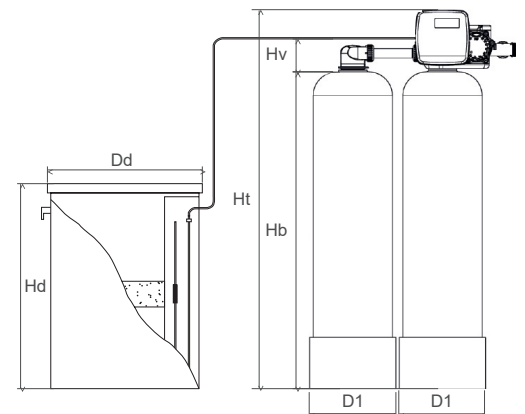

CODE	DIMENSIONS (mm)					
	D1	Hb	Hv	Ht	Hd	Dd
ED-3601-03	207	898	194	1092	680	445
ED-3601-04	258	897	194	1091	680	445
ED-3601-05	258	1126	194	1320	750	500
ED-3601-06	258	1386	194	1580	750	500
ED-3601-07	310	1232	194	1426	750	500
ED-3601-08	336	1398	194	1592	1000	530
ED-3601-09	363	1674	194	1868	1000	530
ED-3601-11	413	1671	194	1865	1000	530
ED-3601-12	413	1671	194	1865	1140	600
ED-3601-13	491	1722	194	1916	1140	600
ED-3601-14	491	1722	194	1916	1140	905

CODE	RESIN LOADING (L)	WORKING FLOW RATE (m ³ /h)	SALT CONSUMP. (Kg)	SALT TANK (L)
ED-3601-03	2 x 20	0,8	4	100
ED-3601-04	2 x 30	1,2	6	100
ED-3601-05	2 x 40	1,6	8	150
ED-3601-06	2 x 50	2,0	10	150
ED-3601-07	2 x 60	2,4	12	150
ED-3601-08	2 x 80	3,2	16	200
ED-3601-09	2 x 100	4,0	20	200
ED-3601-11	2 x 125	5,0	25	200
ED-3601-12	2 x 140	5,6	28	300
ED-3601-13	2 x 170	6,0	34	300
ED-3601-14	2 x 200	6,0	40	500

FT-EN-DESCAL WS1TTDF-ED-3601-XX-FL25V01