

WS1.5Ci DF NORYL

DUPLEX

CLACK 1" ½ SOFTENER

Automatic bibloc water softener for removing hardness using ion exchange resins.

Clack WS1.5Ci DF Noryl volumetric valve in each bottle, digital programmer and instant, delayed or mixed downflow regeneration.

The valve made of Noryl improves resistance to chemicals and has a greater tolerance in saline or corrosive environments compared to metals. In addition, its lower weight simplifies handling.

Permanently softened water, only one bottle in service, the second in regeneration phase or on stand-by.




The image could do not correspond to the model.

- GRP vessel reinforced in polyester
- Regeneration frequency from 1 to 28 days
- External turbine for controlling the volume of treated water
- Includes 3-way valve. Does not include collector between valves or By-pass
- 1 ½ " Connection
- Loaded with food grade resin of high capacity with high performance
- Working pressure: 2.5 to 6 Bar
- Maximum temperature: 43°C
- Power supply: 230V-15Vdc 50/60 Hz



Alternating valve 1 ½ " Noryl

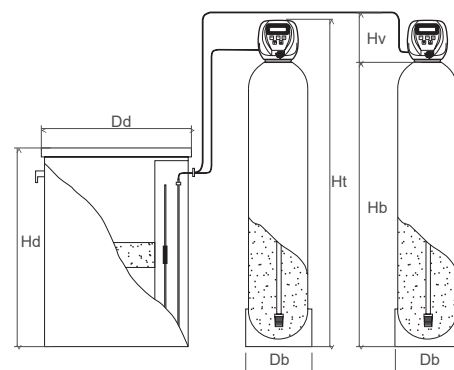

CODE	DIMENSIONS (mm)					
	Db	Hb	Hv	Ht	Dd	Hd
ED-3604-57	363	1674	272	1946	530	1000
ED-3604-58	413	1671	272	1943	600	1140
ED-3604-59	413	1671	272	1943	600	1140
ED-3604-60	491	1722	272	1994	600	1140
ED-3604-61	491	1722	272	1994	905	1140
ED-3604-62	555	1721	272	1993	905	1140
ED-3604-63	635	1918	272	2190	905	1140
ED-3604-64	635	1918	272	2190	1200	1320

CODE	RESIN LOADING (L)	WORKING FLOW RATE (m³/h)	SALT CONSUMP. (Kg)	SALT TANK (L)
ED-3604-57	2 x 100	4	20	300
ED-3604-58	2 x 125	5	25	300
ED-3604-59	2 x 140	5,6	28	500
ED-3604-60	2 x 170	6,8	34	500
ED-3604-61	2 x 200	8	40	500
ED-3604-62	2 x 225	9	45	500
ED-3604-63	2 x 300	12	60	500
ED-3604-64	2 x 350	13,6	70	1000

FT-EN-DESCAL WS1.5CLDF-ED-3604-XX-FL25V01