

WS2Ci DF DUPLEX

CLACK 2" SOFTENER


Alternating duplex softener for removing hardness using ion exchange resins.

Clack WS2Ci DF volumetric valve in each bottle, digital programmer and instant, delayed or mixed downflow regeneration.

Permanently softened water, only one bottle in service, the second in regeneration phase or on standby.



- GRP vessel reinforced in polyester
- Regeneration frequency from 1 to 28 days
- External turbine for controlling the volume of treated water
- Includes 3-way valve. Does not include collector between valves or By-pass.
- 2" Connection
- Loaded with food grade resin of high capacity with high performance
- Working pressure: 2.5 to 6 Bar
- Maximum temperature: 43°C
- Power supply: 200~240V 50/60Hz 15Vdc

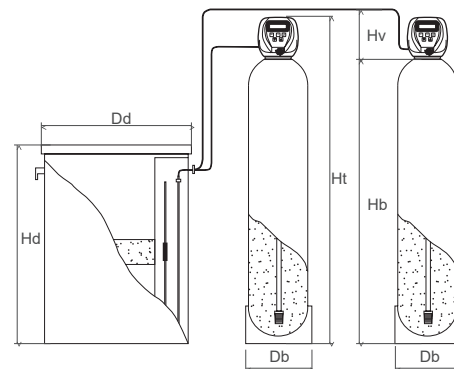

CODE	DIMENSIONS (mm)					
	Db	Hb	Hv	Ht	Dd	Hd
ED-3606-08	413	1671	216	1887	600	1140
ED-3606-09	413	1671	216	1887	905	1140
ED-3606-10	486	1722	216	1938	905	1140
ED-3606-11	486	1722	216	1938	905	1140
ED-3606-12	550	1721	216	1937	905	1140
ED-3606-13	626	1915	216	2132	905	1140
ED-3606-14	626	1915	216	2132	1200	1320
ED-3606-15	780	1836	216	2052	1200	1320
ED-3606-16	938	1856	216	2072	1560	1170

CODE	RESIN LOADING (L)	WORKING FLOW RATE (m³/h)	SALT CONSUMP. (Kg)	SALT TANK (L)
ED-3606-08	2 x 125	5,0	25	300
ED-3606-09	2 x 140	5,6	28	500
ED-3606-10	2 x 170	6,8	34	500
ED-3606-11	2 x 200	8,0	40	500
ED-3606-12	2 x 225	9,0	45	500
ED-3606-13	2 x 300	12,0	60	500
ED-3606-14	2 x 350	14,0	70	1000
ED-3606-15	2 x 500	20,0	100	1000
ED-3606-16	2 x 750	20,0	150	1500

FT-EN-DESCAL WS2CLDF-ED-3606-XX-FL25V01