

WS2Ci DF NORYL DUPLIX CLACK 2" SOFTENER

Alternating duplex softener for removing hardness using ion exchange resins.

Clack WS2Ci DF Noryl volumetric valve in each bottle, digital programmer and instant, delayed or mixed downflow regeneration.


The valve made of Noryl improves resistance to chemicals and has a greater tolerance in saline or corrosive environments compared to metals. Its lower weight simplifies handling.

Permanently softened water, only one bottle in service, the second in regeneration phase or on standby.



The image can do not correspond to the model.

- GRP vessel reinforced in polyester
- Regeneration frequency from 1 to 28 days
- External turbine for controlling the volume of treated water
- Includes 3-way valve. Does not include collector between valves or By-pass.
- 2" Connection
- Loaded with food grade resin of high capacity with high performance
- Working pressure: 2.5 to 6 Bar
- Maximum temperature: 43°C
- Power supply: 200~240V 50/60Hz 15Vdc

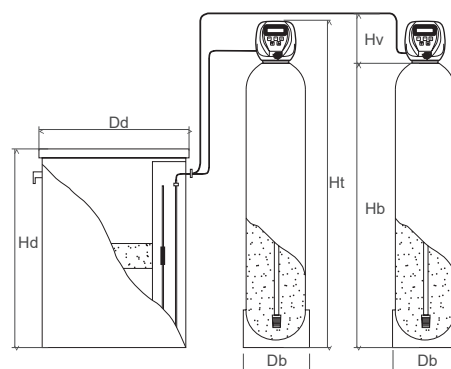

CODE	DIMENSIONS (mm)					
	Db	Hb	Hv	Ht	Dd	Hd
ED-3606-58	413	1671	317	1988	620	1230
ED-3606-59	413	1671	317	1988	620	1230
ED-3606-60	486	1722	317	2039	620	1230
ED-3606-61	486	1722	317	2039	905	1140
ED-3606-62	550	1721	317	2038	905	1140
ED-3606-63	626	1918	317	2235	905	1140
ED-3606-64	626	1918	317	2235	1200	1320
ED-3606-65	780	1836	317	2153	1200	1320
ED-3606-66	938	1856	317	2173	1510	1350

CODE	RESIN LOADING (L)	WORKING FLOW RATE (m³/h)	SALT CONSUMP. (Kg)	SALT TANK (L)
ED-3606-58	2 x 125	5,0	25	300
ED-3606-59	2 x 140	5,6	28	500
ED-3606-60	2 x 170	6,8	34	500
ED-3606-61	2 x 200	8,0	40	500
ED-3606-62	2 x 225	9,0	45	500
ED-3606-63	2 x 300	12,0	60	500
ED-3606-64	2 x 350	14,0	70	1000
ED-3606-65	2 x 500	20,0	100	1000
ED-3606-66	2 x 750	20,0	150	1500

FT-EN-DESCAL WS2CL DF NORYL-ED-3606-XX-FL24V01