PVC

MULTI-CARTRIDGE FILTER

PVC-U multi-cartridge filter housings for 5 or 9 cartridges with flanged top opening, with 2 female inlet/outlet connections for glueing, two ¼" threaded connections for pressure gauges, purge valve and for filter drainage.

All internal material of the filter housing and all internal spare parts are made of PVC-U for high resistance to chemical corrosion.


- Opening gasket and EPDM collector gaskets
- Design pressure = 6.0 bar at 25°C
- Hydraulic test pressure = 7.8 bar
- Max Δp = 1.4 bar
- Operating temperature = 5 - 40 °C
- Suggested tightening torque 6-8 Nm
- Suitable for DOE cartridges
- Cartridge dimensions: ID 28÷30 mm, Ø65 mm and length 40"
- The 940 multi-cartridge filter has a 1" BSPT M drain connection (+ F 20 mm for gluing)




940 MULTICARTRIDGE



540 MULTICARTRIDGE

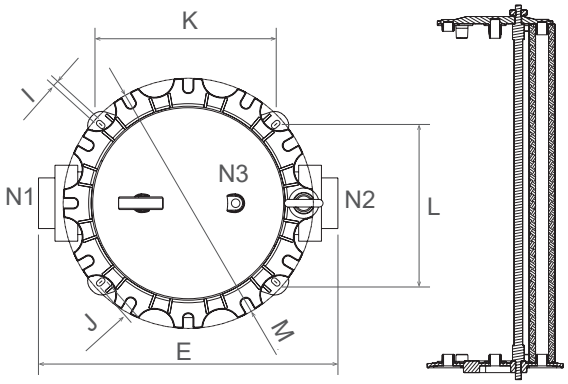

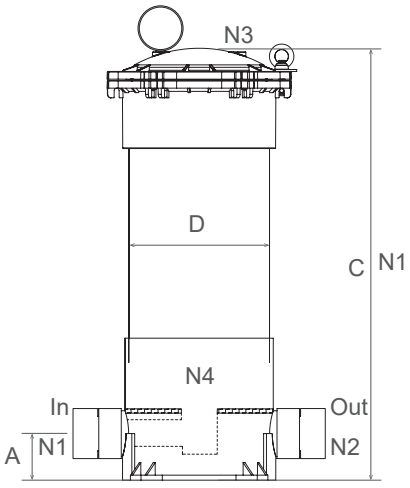

CODE	DIMENSIONS (mm)											
	A	C	ØD	E	ØI	J	K	L	M	N1N2	N3	N4
FI-0223-01	75	1215	225	473	10		187,5	186	Ø290	Male thread mouth diameter D.50 PVC. The filter includes a 3-piece link to glue to D.50.	2 180° female 1/4" threads for plug or pressure gauge	Male thread mouth diameter D.20 PVC. The filter includes a 3-piece link to glue to D.20.
FI-0223-02	69	1245	315	510	9	15	276	249	Ø395	Male thread mouth diameter D.90 PVC. The filter includes a 3-piece link to glue to D.90.		

CODE	MODEL	CARTRIDGES No.	CONNECTIONS	WEIGHT	CAPACITY (L)
FI-0223-01	540 PVC Housing Multicartridge	5 x 40"	IN OUT D.50 glue	14,4 Kg	38,2
FI-0223-02	940 PVC Housing Multicartridge	9 x 40"	IN OUT D.90 glue	26 Kg	74,3

HIDRO-WATER S.L.U.
Ctra. Aldaia-Xirivella, 48 · 46960 Aldaia · Valencia (Spain)
Tel: (+34) 961 986 230 · hidrowater@hidro-water.com · www.hidro-water.com