



2G STANDING WATER DISPENSER

Hydration and efficiency for all spaces

Having a high-quality water source goes beyond convenience: it is essential for well-being and productivity in any environment.

The 2G fountain stands out for its large capacity and double tap, which provides instant hot and cold water.

It is perfect for places where a high volume of water is required throughout the day, such as offices, schools, and public centers... *(Suitable for filling glasses. Not recommended for continuous use for filling bottles or large volumes of water).*


Thanks to its robust and functional design, it guarantees continuous use, easy maintenance, and maximum durability.



CARTRIDGE CHANGE



SAFETY LOCK
FOR HOT WATER

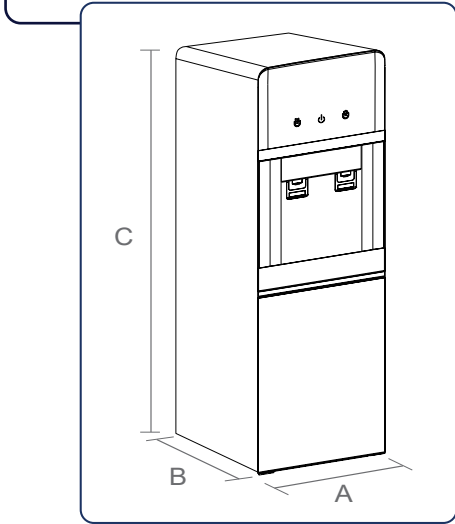

SYSTEM MEASURES

CODE	DIMENSIONS (mm)		
	A	B	C
FU-8010-02	300	330	1150

TWO FAUCETS, TWICE THE CONVENIENCE: HOT AND COLD WATER IN A SINGLE DISPENSER

Key points:

- Two separate taps: hot and cold water available.
- High performance: perfect for places with high daily consumption. *(Suitable for filling glasses. Not recommended for continuous use for filling bottles or large volumes of water).*
- Hot water for teas, coffees, or instant meals.
- Versatile and durable: ideal for offices, schools, and public centers.
- Modern and practical design, easy to install and maintain.

Technical specifications

- Supplies cold and hot water.
- Practical faucets: just push the glass.
- With 4-stage reverse osmosis:
 - PP sediment prefilter.
 - GAC activated carbon cartridge.
 - 100 GPD ME membrane.
 - POST Postfilter.
- High efficiency compressor cooling.
- Use of R134a refrigerant gas.
- UV light for water disinfection.
- Safety lock on hot water tap.
- On/off switch for cold/hot water.
- Power: 520W.
 - Hot water 420W.
 - Cold water 100W.
- Cooling capacity: 4 - 8 L/h between 8 - 12 °C.
- Heating capacity: 4 L/h between 70 - 80 °C.
- Cold water tank capacity: 2L.
- Hot water tank capacity: 0,8L.
- Working pressure: 1-4 Bar
- Voltage: 220-240V 50/60HZ



CODE	MODEL	AMBIENT	COLD	HOT	DISPENSING AREA
FU-8010-02	2G STANDING WATER DISPENSER	-	✓	✓	205 mm

REVERSE OSMOSIS WATER DISPENSER SPARE PARTS

CA-8010-02	PP sediment cartridge
CA-8010-04	GAC activated carbon cartridge
ME-8010-02	ME 100 GPD Membrane
CA-8010-06	POST post-filter
OI-8016-23	UV LED light