

3GS

WATER DISPENSER FOR COUNTER

3 TAPS: Cold, hot, and room temperature water with the best taste, always within reach.

The 3-tap tabletop fountain offers maximum functionality in a compact and elegant format. Designed to adapt to all types of spaces, it provides cold, hot, and room temperature water of exceptional quality thanks to its integrated filtration system, which improves the taste and purity of the water.

The 3-stage reverse osmosis system incorporates a PRE cartridge that removes sediment, chlorine, and large particles; a 100 GPD RO membrane that purifies the water by retaining impurities, salts, and contaminants; and finally a POST filter that improves the final taste of the water, ensuring freshness and purity.



In addition, the high-efficiency compressor cooling system guarantees cold water with low energy consumption.



CARTRIDGE CHANGE



SAFETY LOCK FOR HOT WATER

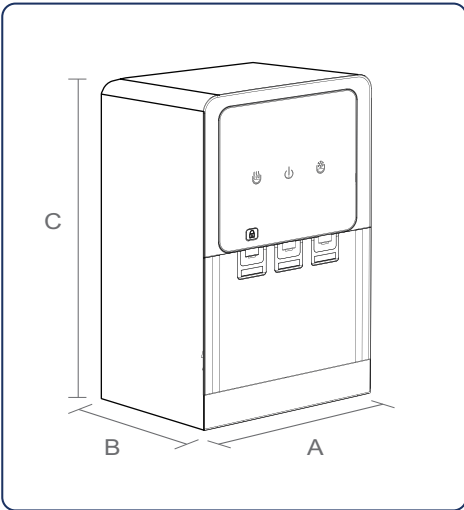

SYSTEM MEASURES

CODE	DIMENSIONS (mm)		
	A	B	C
FU-8010-05	300	410	560

WATER ALWAYS AT THE PERFECT TEMPERATURE, IN TABLETOP FORMAT.

Key points:

- Three separate taps: hot, room temperature and cold water available.
- Compact desktop format: practical design that easily adapts to any surface, without the need for complex installation.
- High performance: perfect for places with high daily consumption. *(Suitable for filling glasses. Not recommended for continuous use for filling bottles or large volumes of water).*
- Hot water: perfect for making tea, coffee, or instant meals with total convenience.
- Versatile and durable: designed for offices, schools, public centers, or rest areas.
- Modern and functional design: its robust structure and contemporary aesthetics perfectly combine efficiency and style.

Technical specifications

- Supplies cold, ambient and hot water.
- With 3-stage reverse osmosis:
 - PRE composite cartridge.
 - 100 GPD ME membrane.
 - POST Postfilter.
- High efficiency compressor cooling.
- Use of R134a refrigerant gas.
- Luz UV para desinfección del agua.
- UV light for water disinfection.
- Safety lock on hot water tap.
- On/off switch for cold/hot water.
- Power: 520W.
 - Hot water 420W.
 - Cold water 100W.
- Cooling capacity: 4–8 L/h at 8–12 °C
- Heating capacity: 4 L/h at 70–80 °C
- Cold water tank capacity: 2 L
- Hot water tank capacity: 0.8 L
- Ambient water temperature: 15–25 °C
- Working pressure: 1-4 Bar
- Voltage: 220-240V 50/60HZ



CODE	MODEL	AMBIENT	COLD	HOT	DISPENSING AREA
FU-8010-05	3GS WATER DISPENSER FOR COUNTER	✓	✓	✓	205 mm
REVERSE OSMOSIS WATER DISPENSER SPARE PARTS					
CA-8010-03	PRE composite cartridge				
ME-8010-02	ME 100 GPD Membrane				
CA-8010-05	POST post-filter				
OI-8016-23	UV LED light				