


FLAT PROJECTOR


WHITE LED



OPTIONAL SUPPORT
FOR LINER POOLS

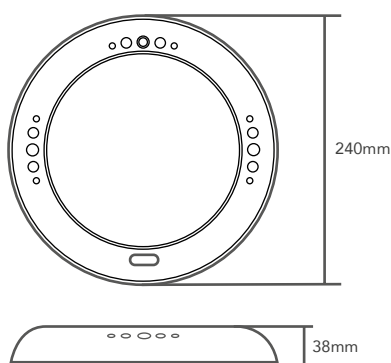

- Flat LED light manufactured in white ABS.
- Low power consumption.
- 100% waterproofing security thanks to Epoxy filling.
- Installation in concrete (for liner, optional support).
- Supplied with 2.5 meter cable.
- LED type SMD2835.
- Voltage: AC 12V / 50-60 Hz.

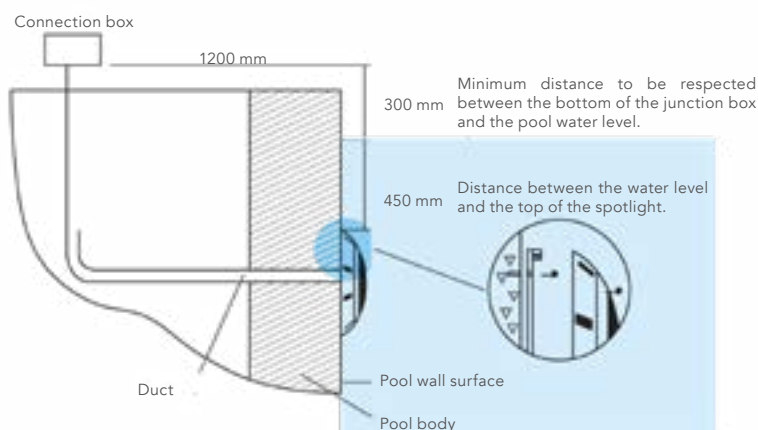

1. This light is powered with 12V AC. It has to be connected to the transformer, never directly to the electric network directly.
2. The connection box must be at least 1.2m from the edge of the pool.
3. The installation plate should be placed in such a way that the upper part of the spotlight is at least 450mm below the water level of the pool.
4. The light must always be placed on flat surfaces. Screw the fixing plate with the four screws.
5. Connect the cables with their corresponding ones in the connection box and fill with epoxy glue.
6. Before testing the lamp for more than ten seconds, it must be immersed completely in water.

PROJECTOR CONNECTION

Cable protector. If the interconnection of the cables is done below the water level, this connection must be made with a watertight joint or / and epoxy glue. Otherwise, moisture could enter the focus through the cable, voiding the warranty.

CODE	MODEL	LUMENS	POWER (W)	UNITY BOX	FAM.
HP-0207-31	252 LED Cold White flat projector	1600	18	1	A
HP-0207-32	252 LED Warm White flat projector	1600	18	1	A
HP-0207-41	513 LED Cold White flat projector	3200	40	1	A
HP-0207-42	513 LED Warm White flat projector	3200	40	1	A
HP-0207-99	Optional support for liner pools				A

CODE	DESCRIPTION	FAMILY
HP-0205-90	Cable protector	A