





White and RGB LED spotlight measurement

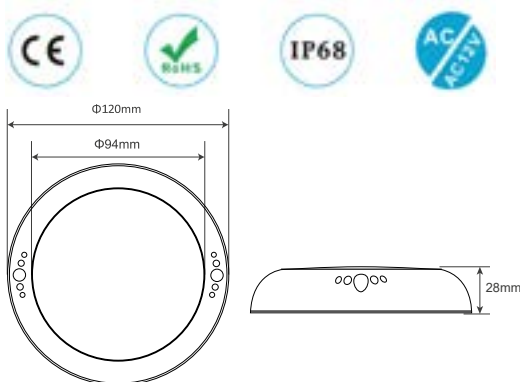

Does not include batteries

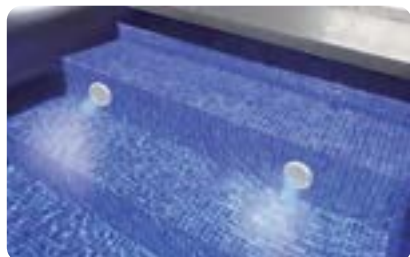

CODE	DESCRIPTION	FAMILY
HP-0205-90	Cable protector	A

CODE	MODEL	LUMENS	POWER (W)	UNITY BOX	FAMILY
HP-0205-48	Mini LED WARM WHITE spotlight	880	8	1	A
HP-0205-49	Mini LED COLD WHITE spotlight	880	8	1	A
HP-0205-50	Mini LED RGB spotlight + remote control	440	8	1	A

MINI SPOTLIGHT WHITE / RGB+REMOTE CONTROL



- Flat LED light manufactured in white ABS.
- Low power consumption RGB led.
- 100% waterproofing security thanks to Epoxy filling.
- Installation in concrete.
- Cable: supplied with 2.5m 3-wire hose (V +; V-; antenna)
- 15 color programs mode ON/OFF control.
- 13 programs mode Remote Control.
- LED type SMD2835.
- Voltage: AC 12V/50-60 Hz
- **In order not to reduce the range of action of the control, the antenna cable must be routed to the junction box.**



RGB REMOTE CONTROL PROGRAMMING

- | | |
|-------------------------|---|
| 1. ON | 10. Red-red/green-green cicle |
| 2. OFF | 11. Green-green/blue-blue cicle |
| 3. Fixed blue | 12. Red-red/blue-blue cicle |
| 4. Fixed red | 13. Red-green-blue cicle The speed changes from slower to faster. |
| 5. Fixed green | 14. Green-red/blue-blue-red-white-blue/green-red/green cicle |
| 6. Fixed red/blue | 15. Gradual change to all colours |
| 7. Fixed blue/green | |
| 8. Fixed red/green | |
| 9. Fixed red-green-blue | |

PROJECTOR CONNECTION

Cable protector. If the interconnection of the cables is done below the water level, this connection must be made with a watertight joint or / and epoxy glue. Otherwise, moisture could enter the focus through the cable, voiding the warranty