




## PANEL CL<sub>2</sub>

### TECHNICAL CHARACTERISTICS

- Amperometric probe 0-5 ppm.
- Temperature measurement with PT100 / PT1000 probe (optional).
- Programming keyboard with 5 keys.
- Graphic display, 128x128 pixels, backlit with white led.
- 1 programmable analog output.
- 1 programmable digital frequency output.
- 2 relay outputs for remote intervention, washing and alarm thresholds.
- 1 digital input for dose blocking.
- 100÷240 Vac 50-60 Hz
- 12÷32 Vd

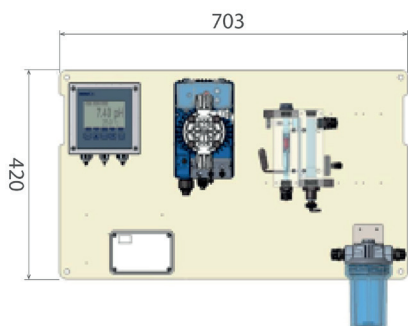

### INCLUDES

- Central control.
- Reading Cell.
- Sediment filter
- Washable Cartridge.
- Filter Key.
- Installation kit.
- Cleaning kit.
- Panel de montaje
- Dosing machine: DO-2002-10 ~ 8 L - 2 Bar.
- Mounting panel

| CODE       | MODEL                   | FAM. |
|------------|-------------------------|------|
| HP-4028-90 | Galvanic Chlorine Panel | B    |
| IN-2610-02 | Chlorine Probe          | C    |
| IN-7804-07 | Chlorine probe beads    | C    |