


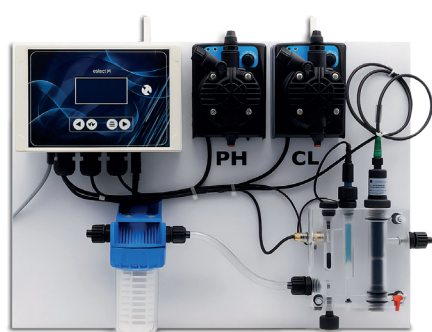

pH y CL₂ MEMBRANE PANEL

- Safety filter
- Methacrylate probe holder
- Flow sensor
- 0-5 PPM amperometric probe
- Flow regulator
- M series single parameter controller
- RS485 MODBUS communication output
- Programmable relay output
- Alarm relay output
- Internal clock
- Temperature sensor input
- Level sensor input
- 2 relay outputs for measurement 1
- 1 relay output for measurement 2
- 2 analog outputs 4-20 mA (1 per reading)

2 dosing pumps 5-5

PUMP FEATURES

- Manual flow adjustment 0-100%
- PP head
- PP suction/injection kit
- Injector with lip valve
- Flow rate 5 l/h - 5 Bar
- Maximum back pressure 5 Bar
- Wall or base mount included

Recomendación
de uso:
Ácido Sulfúrico

CODE	MODEL	FAM
HP-4034-80	Chlorine and pH membrane panel	B
HP-4034-84	0-5 ppm membrane probe	B
HP-4034-86	Electrolyte gel	B
HP-4034-88	Free chlorine membrane	B