


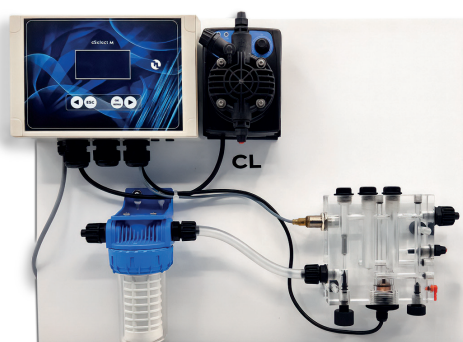

CL₂ CONTROL PANEL

TECHNICAL CHARACTERISTICS

- Safety filter
- Methacrylate probe holder
- Flow sensor
- 0-5 PPM amperometric probe
- Flow regulator
- M series single parameter controller
- Basic or expert menu with multiple configuration options
- RS485 MODBUS communication output
- Programmable relay output
- Alarm relay output
- Internal clock
- Temperature sensor input
- Level sensor input
- Chlorine reading and management
- 1 analog output 4-20 mA (1 per reading)
- 1 PKX 5-5 pump

PUMP FEATURES

- Manual flow adjustment 0-100%
- PP head
- PP suction/injection kit
- Injector with lip valve
- Flow rate 5 l/h - 5 Bar
- Maximum back pressure 5 Bar
- Wall or base mount included

CODE	MODEL	FAM.
HP-4034-90	CL ₂ control panel	B
HP-4034-76	Chlorine Probe	C
HP-4034-78	Chlorine probe beads	C