



BOOSTER PUMPS AND ADAPTERS


Pressure pumps for osmosis systems that provide an ideal inlet pressure for efficient membrane utilization. These highly efficient pumps provide continuous service and are also effective in recirculation applications.

- Highly resistant diaphragm pumps
- Designed for osmosis as well as other commercial water treatment equipment
- Revolutionary design
- High efficiency, low energy cost
- Longer life with long lasting performance

HF-45L SERIE

High flow and low energy consumption booster pump.

- Electrical connection: DC48V 2.3A
- Maximum working pressure: 10.5 Bar
- Membrane: 2x200 GPD
- Maximum flow rate: 3.0 L/min.
- Used in lara direct flow reverse osmosis

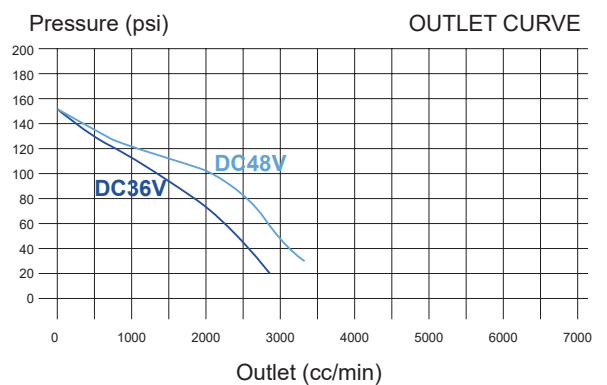

CODE	MODEL
OI-0234-64	HF-45L
OI-0234-68	Adapter 230V-48V 2.3 A

