



BOOSTER PUMPS AND ADAPTERS



Pressure pumps for osmosis systems that provide an ideal inlet pressure for efficient membrane utilization. These highly efficient pumps provide continuous service and are also effective in recirculation applications.

- Highly resistant diaphragm pumps
- Designed for osmosis as well as other commercial water treatment equipment
- Revolutionary design
- High efficiency, low energy cost
- Longer life with long lasting performance

LF-30LN SERIE

High flow and low energy consumption booster pump.

- Electrical connection: DC24V 1.2A
- Maximum working pressure: 9.1 Bar
- Membrane: 50GPD and 75GPD
- Maximum flow rate: 1.8 L/min.

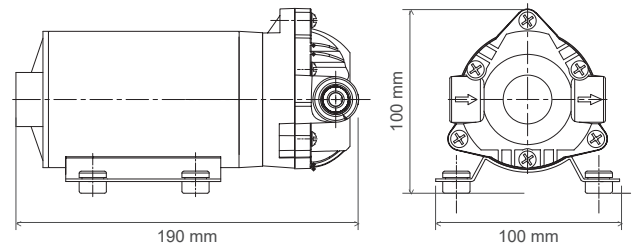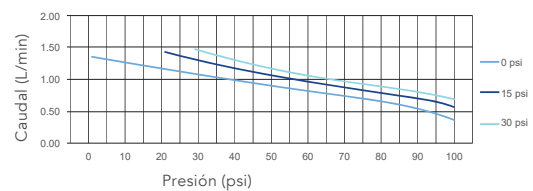

CODE	MODEL
OI-0236-10	LF-30LN
OI-0207-11	Adapter 230V-24VDC 1.2 A
OI-0235-14	Electronic adapter 230V-24VDC 1.7 A