




## HW STATIC MIXER

Material: UPVC.

Maximum pressure: PN10

OTHER APPLICATIONS:

- Mixing of water treatment chemicals
- pH control
- Chlorination and ozonation
- Process control sampling

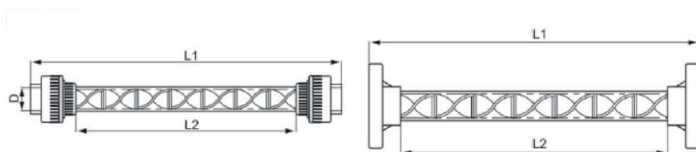

| MODEL      | DIMENSIONS (mm) |     |     |
|------------|-----------------|-----|-----|
|            | D               | L1  | L2  |
| TU-1069-02 | 20              | 252 | 156 |
| TU-1069-04 | 25              | 330 | 225 |
| TU-1069-06 | 32              | 420 | 292 |
| TU-1069-08 | 40              | 495 | 336 |
| TU-1069-10 | 50              | 565 | 406 |
| TU-1069-12 | 63              | 695 | 497 |
| TU-1069-14 | 75              | 900 | 642 |
| TU-1069-16 | 90              | 880 | 770 |
| TU-1069-18 | 110             | 990 | 850 |

| CODE       | MODEL              | DIAMETER | CAPACITY (m³/h) | CONEXION | FAM. |
|------------|--------------------|----------|-----------------|----------|------|
| TU-1069-02 | Static mixer DN15  | 20 mm    | 0.4-1           | GLUE     | B    |
| TU-1069-04 | Static mixer DN20  | 25 mm    | 0.6-1.8         | GLUE     | B    |
| TU-1069-06 | Static mixer DN25  | 32 mm    | 1-3.2           | GLUE     | B    |
| TU-1069-08 | Static mixer DN32  | 40 mm    | 1.4-6           | GLUE     | B    |
| TU-1069-10 | Static mixer DN40  | 50 mm    | 2.2-10          | GLUE     | B    |
| TU-1069-12 | Static mixer DN50  | 63 mm    | 3.5-18          | GLUE     | B    |
| TU-1069-14 | Static mixer DN65  | 75 mm    | 10-30           | GLUE     | B    |
| TU-1069-16 | Static mixer DN80  | DN80     | 15-45           | FLANGES  | B    |
| TU-1069-18 | Static mixer DN100 | DN100    | 30-70           | FLANGES  | B    |