

Ever



RAPID FIT BY-PASS



Technology and innovation
Express partial regeneration - reduces washing time.



Easy to use
"Easy push button" set up, only takes a few seconds.



Efficiency and saving
High Efficiency Standard on all equipment in the range.



Easy installation and maintenance:
Rapid Fit By-pass system, which allows the equipment to be isolated from the installation in a few seconds by releasing just a few clips.



European Certificate of Conformity

COMPACT SOFTENER FOR WATER OF DOMESTIC USE


The definitive solution for the sustainable use of water.

Higher capacity, lower water consumption and salt savings.

Great adaptability to different spaces and positions.


Smart Regeneration, with High Performance Resin it offers a winning combination in capacity, lower water consumption and greater salt saving.

Ultra-fast installation with the **Rapid-Fit Bypass**.

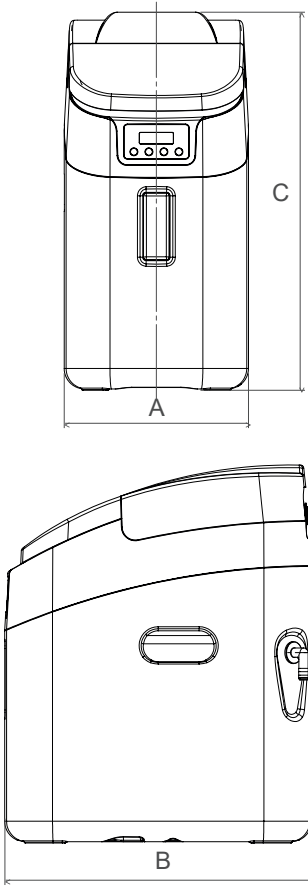

SYSTEM MEASURES

CODE	DIMENSIONS (mm)		
	A	B	C
UF-2011-02	270	450	479
UF-2011-04	270	450	554
UF-2011-06	270	450	707
UF-2011-08	270	450	1038



PACKAGING AND TRANSPORTATION

CODE	DIMENSIONS (mm)			WEIGHT (Kg)	LOGISTICS (unit)		
	A	B	C		Pallet	Conten. 20'	Conten. 40'
UF-2011-02	545	335	585	18	10	100	200
UF-2011-04	545	335	660	21	10	100	200
UF-2011-06	515	303	780	28,5	10	100	200
UF-2011-08	515	305	1110	43	5	100	200


EVER

WATER SOFTENER

Compact automatic softeners for hardness removal using ion exchange resins. **Low salt consumption.**

With metered valve, digital programmer and upflow delayed regeneration.

- Cabinet made of blown polyethylene.
- GRP vessel reinforced in polyester (PRFV).
- Smart regenerations: partial and complete.
- Integrated hardness mixer.
- Supersense Turbine for the volume control of the treated water.
- 3/4" Connection.
- Rapid-Fit By-pass.
- Safety salt buoy included.
- Loaded with food grade resin of high capacity with high performance.
- Working pressure: 2,5 a 6 Bar
- Max. temperature: 43°C
- Power supply: 220 ~ 240V / 12V ~ 50Hz

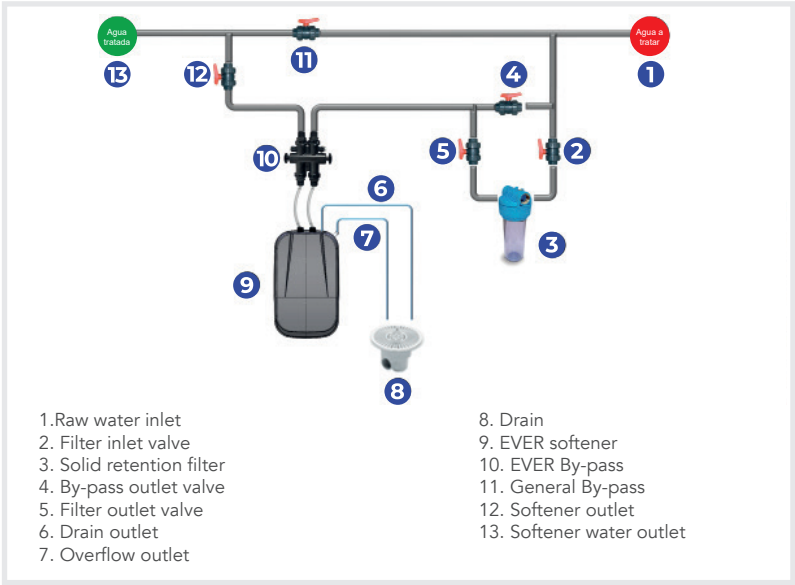

CODE	MODEL	WORK FLOW (m³/h)	SALT INTAKE (Kg)
UF-2011-02	Ever 9L	0,31	0,9
UF-2011-04	Ever 12L	0,41	1,2
UF-2011-06	Ever 18L	0,62	1,8
UF-2011-08	Ever 30L	1,02	3

FT-EN-DESCAL-EVER-UF-2011-XX-FL25V01