

Clack®



WS1.25Ci UF

UPFLOW

CLACK 1" ¼ SOFTENER


Automatic bibloc softener for removing hardness using ion exchange resins.

LOW SALT CONSUMPTION.

Clack WS1.25Ci UF volumetric valve, digital programmer and delayed or instantaneous upflow regeneration.



NWBP-1-1 shut-off valve ¼ "

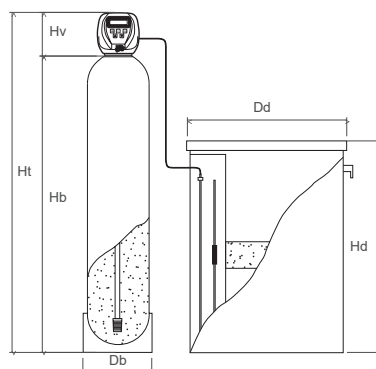

- GRP vessel reinforced in polyester
- Integrated hardness mixer
- Regeneration frequency from 1 to 28 days
- Turbine for controlling the volume of treated water
- 1 ¼" Connection
- Loaded with food grade resin of high capacity with high performance
- Working pressure: 2.5 to 6 Bar
- Maximum temperature: 43°C
- Power supply: 200~240V 50/60Hz 15Vdc

CODE	DIMENSIONS (mm)					
	Db	Hb	Hv	Ht	Dd	Hd
UF-3203-06	336	1398	183	1581	530	1000
UF-3203-07	363	1674	183	1857	530	1000
UF-3203-08	413	1671	183	1854	530	1000
UF-3203-10	491	1722	183	1905	600	1140
UF-3203-12	555	1721	183	1904	905	1140

CODE	RESIN LOADING (L)	WORKING FLOW RATE (m³/h)	SALT CONSUMP. (Kg)	SALT TANK (L)
UF-3203-06	100	3,4	10	200
UF-3203-07	136	4,6	13,6	200
UF-3203-08	166	5,6	16,6	200
UF-3203-10	240	7,7	24	300
UF-3203-12	300	7,7	30	500

CODE	MODEL
VA-3002-12	NWBP-1-1 shut-off valve ¼ "

FT-EN-DESCAL WS1.25CLUF-UF-3203-XX-FL25V01