



WS1.5Ci UF

UPFLOW

CLACK 1" ½ WATER SOFTENER


Automatic bibloc water softener for removing hardness using ion exchange resins.

LOW SALT CONSUMPTION.

Clack WS1.5Ci UF volumetric valve, digital programmer and delayed or instantaneous upflow regeneration.



1" shut-off valve ½

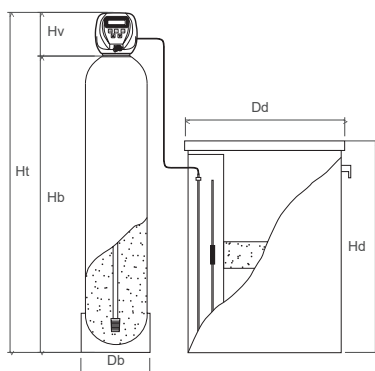

- GRP vessel reinforced in polyester
- Regeneration frequency from 1 to 28 days
- External turbine for controlling the volume of treated water
- 1 ½ " Connection
- Loaded with food grade resin of high capacity with high performance
- Working pressure: 2.5 to 6 Bar
- Maximum temperature: 43°C
- Power supply: 200~240V 50/60Hz 15Vdc

CODE	DIMENSIONS (mm)					
	Db	Hb	Hv	Ht	Dd	Hd
UF-3204-07	363	1674	237	1911	530	1000
UF-3204-08	413	1671	237	1908	600	1140
UF-3204-10	491	1722	237	1959	600	1140
UF-3204-12	555	1721	237	1958	905	1140
UF-3204-14	635	1918	237	2155	1200	1320

CODE	RESIN LOADING (L)	WORKING FLOW RATE (m³/h)	SALT CONSUMP. (Kg)	SALT TANK (L)
UF-3204-07	136	4,5	13,6	200
UF-3204-08	166	5,5	16,6	300
UF-3204-10	240	8,2	24	300
UF-3204-12	300	10,2	30	500
UF-3204-14	430	13,5	43	1000

CODE	MODEL
VA-3004-12	1 ½" shut-off valve

FT-EN-DESCAL WS1.25CLUF NORYL-UF-3204-XX-FL24V01