




WS1.25Ci UF DUPLEX UPFLOW CLACK 1" ¼ SOFTENER

Alternating duplex softener for removing hardness using ion exchange resins.

Clack WS1.25Ci UF volumetric valve in each bottle, digital programmer and instant upflow regeneration.

LOW SALT CONSUMPTION.

Permanently softened water, only one bottle in service, the second in regeneration phase or on standby.

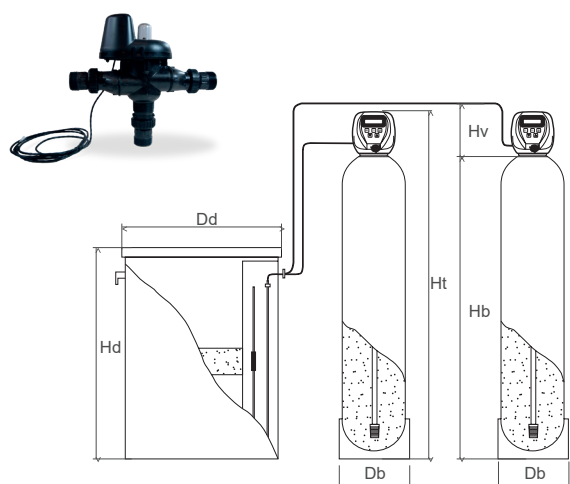

- GRP vessel reinforced in polyester
- Regeneration frequency from 1 to 28 days
- Integrated hardness mixer
- Turbine for controlling the volume of treated water
- Includes 3-way valve. Does not include collector between valves or By-pass.
- 1 ¼ " Connection
- Loaded with food grade resin of high capacity with high performance
- Working pressure: 2.5 to 6 Bar
- Maximum temperature: 43°C
- Power supply: 200~240V 50/60Hz 15Vdc

CODE	DIMENSIONS (mm)					
	Db	Hb	Hv	Ht	Dd	Hd
UF-3602-06	336	1398	183	1581	530	1000
UF-3602-07	363	1674	183	1857	530	1000
UF-3602-08	413	1671	183	1854	600	1140
UF-3602-10	491	1722	183	1905	600	1140
UF-3602-12	555	1721	183	1904	905	1140

CODE	RESIN LOADING (L)	WORKING FLOW RATE (m³/h)	SALT CONSUMP. (Kg)	SALT TANK (L)
UF-3602-06	2 x 100	3,4	10	200
UF-3602-07	2 x 136	4,6	13,6	200
UF-3602-08	2 x 166	5,6	16,6	300
UF-3602-10	2 x 240	7,7	24	300
UF-3602-12	2 x 300	7,7	30	500