



Clack®

WS1.5Ci UF NORYL

DUPLEX UPFLOW

CLACK 1" 1/2 SOFTENER

Alternating duplex softener for removing hardness using ion exchange resins.

Clack WS1.5Ci UF Noryl volumetric valve in each bottle, digital programmer and instant, delayed or mixed upflow regeneration.

LOW SALT CONSUMPTION


The valve made of Noryl improves resistance to chemicals and has a greater tolerance in saline or corrosive environments compared to metals. Its lower weight simplifies handling.

Permanently softened water, only one bottle in service, the second in regeneration phase or on standby.

The image could do not correspond to the model.



Alternating valve 1 1/2" Noryl

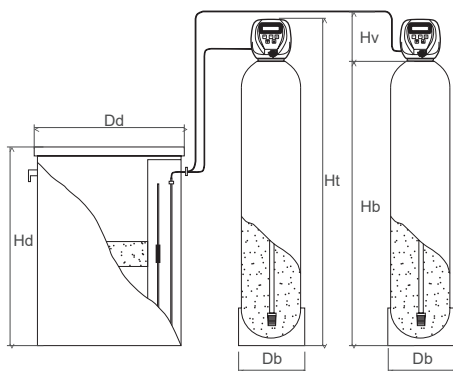

- GRP vessel reinforced in polyester
- Regeneration frequency from 1 to 28 days
- External turbine for controlling the volume of treated water
- Includes 3-way valve. Does not include collector between valves or By-pass
- 1 1/2" connection
- Loaded with food grade resin of high capacity with high performance
- Working pressure: 2.5 to 6 Bar
- Maximum temperature: 43°C
- Power supply: 230V-15Vdc 50/60 Hz

CODE	DIMENSIONS (mm)					
	Db	Hb	Hv	Ht	Dd	Hd
UF-3604-57	363	1674	272	1946	530	1000
UF-3604-58	413	1671	272	1943	600	1140
UF-3604-60	491	1722	272	1994	600	1140
UF-3604-62	555	1721	272	1993	905	1140
UF-3604-64	635	1918	272	2190	1200	1320

CODE	RESIN LOADING (L)	WORKING FLOW RATE (m³/h)	SALT CONSUMP. (Kg)	SALT TANK (L)
UF-3604-57	2 x 136	4,6	13,6	200
UF-3604-58	2 x 166	5,6	16,6	300
UF-3604-60	2 x 240	8,1	24	300
UF-3604-62	2 x 300	10,2	30	500
UF-3604-64	2 x 430	13,6	43	1000

FT-EN-DESCAL WS1.25CLUF NORYL-UF-3204-XX-FL24V01