



The image could do not correspond to the model.

TWIN WS1.5TT UF NORYL UPFLOW

CLACK 1" ½ SOFTENER


Twin alternating softener for removing hardness using ion exchange resins.

Clack WS1.5TT UF Noryl volumetric valve for control of the two bottles, digital programmer and instant upflow regeneration.

LOW SALT CONSUMPTION

The valve made of Noryl improves resistance to chemicals and has a greater tolerance in saline or corrosive environments compared to metals. Its lower weight simplifies handling.

Permanently softened water, only one bottle in service, the second in regeneration phase or on stand-by.

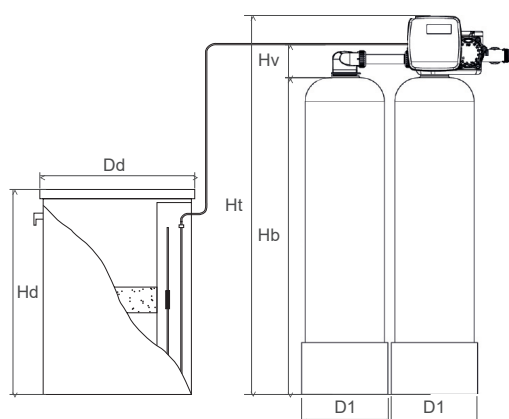

- Its special design allows for optimal service flow rates (up to 12.3 m³/h) and backwashing.
- GRP vessel reinforced in polyester
- Regeneration frequency from 1 to 28 days
- Turbine for controlling the volume of treated water
- Includes collector between bottles.
- 1 1/2" Connection
- High capacity food grade resin filler for high performance
- Working pressure: 2.5 to 6 Bar
- Maximum temperature: 43°C
- Power supply: 230V-15Vdc 50/60 Hz

CODE	DIMENSIONS (mm)					
	D1	Hb	Hv	Ht	Dd	Hd
UF-3605-57	363	1674	281	1955	530	1000
UF-3605-58	413	1671	281	1952	600	1140
UF-3605-60	491	1722	281	2003	600	1140
UF-3605-62	555	1721	281	2002	905	1140

CODE	RESIN LOADING (L)	WORKING FLOW RATE (m³/h)	SALT CONSUMP. (Kg)	SALT TANK (L)
UF-3605-57	2x136	4,6	13,6	200
UF-3605-58	2x166	5,6	16,6	300
UF-3605-60	2x240	8,16	24	300
UF-3605-62	2x300	10,2	30	500
UF-3605-64	2x430	12,3	43	1000

CODE	MODEL
AV-3002-22	Kit micro Clack 1" - 1 1/4" - 1 1/2"

FT-EN-DESCAL WS1.5TTUF NORYL-UF-3605-XX-FL24V01