

Clack®



WS2Ci UF NORYL

DUPLEX UPFLOW

CLACK 2" WATER SOFTENER

Alternating duplex softener for removing hardness using ion exchange resins.


Clack WS2Ci UF Noryl volumetric valve in each bottle, digital programmer and instant, delayed or mixed upflow regeneration.

LOW SALT CONSUMPTION

The valve made of Noryl improves resistance to chemicals and has a greater tolerance in saline or corrosive environments compared to metals. Its lower weight simplifies handling.

Permanently softened water, only one bottle in service, the second in regeneration phase or on standby.

The image can do not correspond to the model.

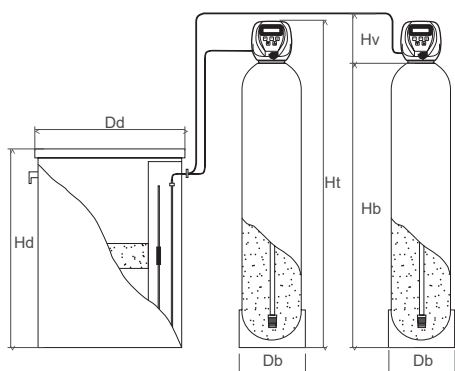

- GRP vessel reinforced in polyester
- Regeneration frequency from 1 to 28 days
- External turbine for controlling the volume of treated water
- Includes 3-way valve. Does not include collector between valves or By-pass.
- 2" Connection
- Loaded with food grade resin of high capacity with high performance
- Working pressure: 2.5 to 6 Bar
- Maximum temperature: 43°C
- Power supply: 200~240V 50/60Hz 15Vdc

CODE	DIMENSIONS (mm)					
	Db	Hb	Hv	Ht	Dd	Hd
UF-3606-58	413	1671	317	1988	620	1230
UF-3606-60	486	1722	317	2039	620	1230
UF-3606-62	550	1721	317	2038	905	1140
UF-3606-64	626	1918	317	2235	1200	1320
UF-3606-65	780	1836	317	2153	1200	1320
UF-3605666	938	1856	317	2173	1510	1350

CODE	RESIN LOADING (L)	WORKING FLOW RATE (m³/h)	SALT CONSUMP. (Kg)	SALT TANK (L)
UF-3606-58	2 x 166	5,6	16.6	300
UF-3606-60	2 x 240	8,2	24	300
UF-3606-62	2 x 300	10,2	30	500
UF-3606-64	2 x 430	14,6	43	1000
UF-3606-65	2 x 700	20	70	1000
UF-3606-66	2 x 990	20	99	1500

FT-EN-DESCAL WS2CL UF NORYL-UF-3605-XX-FL24V01