
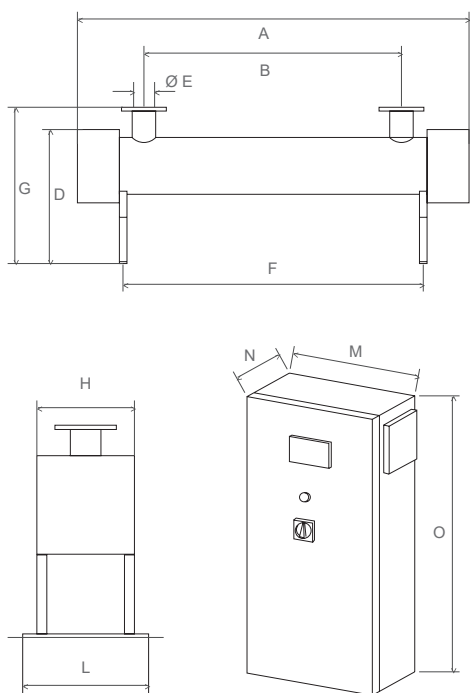


INDUSTRIAL ULTRAVIOLET

UV water disinfection system that covers everything from small flow rates to large industrial or municipal systems.

They are made of high-quality stainless steel and incorporate special low-pressure mercury lamps.

- Material AISI 316
- Lamp life: 8.000 hours
- Dosis: 40.000 mj/cm2
- LED operation indicator
- Includes hour counter and failure alarm.
- Maximum working pressure: 8 bar
- Working temperature: 2° to 35°C
- Electrical voltage: 230V-50Hz

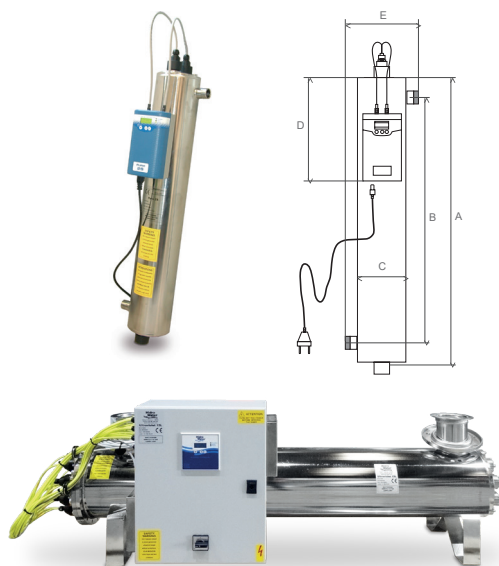

CODE	MODEL	CONNECT.	MAX FLOW. (m³/h)	NO. LAMPS
UV-1002-03	1S	1" M	2	1 x 40W
UV-1002-04	2S	1" M	4	2 x 40W
UV-1002-05	4S	1 ½" H	10	4 x 40W
UV-1002-06	6S	2" H	15	6 x 40W
UV-1002-07	4L	DN50	20	4 x 65W
UV-1002-08	6L	DN80	30	6 x 65W
UV-1002-09	8L	DN80	40	8 x 65W
UV-1002-10	10L	DN100	50	10 x 65W
UV-1002-11	12L	DN100	60	12 x 65W
UV-1002-12	16L	DN100	80	16 x 65W
UV-1002-13	20L	DN125	100	20 x 65W
UV-1002-14	24L	DN125	120	24 x 65W
UV-1002-15	32L	DN150	160	32 x 65W
UV-1002-16	40L	DN150	200	40 x 65W
UV-1002-17	48L	DN150	240	48 x 65W

CODE	MODEL
RU-1204-02	40W lamp
RU-1206-01	65W lamp
RU-1204-03	40W quartz tube
RU-1206-02	65W quartz tube

It is recommended to change lamps at least once a year.

CODE	MODEL	DIMENSIONS (mm)												weight (Kg)
		A	B	C	D	AND	F	G	H	L	M	N	THE	
UV-1002-03	1S	835	695	90	300	180	-	-	-	-	-	-	-	-
UV-1002-04	2S	825	700	139	300	210	-	-	-	-	-	-	-	-
UV-1002-05	4S	1060	630	-	470	1 1/2" F in/out	720	480	435	430	400	150	600	60
UV-1002-06	6S	1060	630	-	580	2" F in/out	720	580	490	480	500	200	700	72
UV-1002-07	4L	1800	1300	-	470	DN50 in/out	1460	550	445	430	500	200	700	75
UV-1002-08	6L	1800	1300	-	580	DN80 in/out	1440	680	490	480	500	210	670	85
UV-1002-09	8L	1800	1300	-	580	DN80 in/out	1440	680	530	480	600	250	800	95
UV-1002-10	10L	1850	1250	-	650	DN100 in/out	1430	760	600	550	600	250	800	115
UV-1002-11	12L	1850	1250	-	650	DN100 in/out	1430	760	600	550	600	300	1000	120
UV-1002-12	16L	1850	1250	-	700	DN100 in/out	1430	810	700	660	600	300	1000	150
UV-1002-13	20L	1850	1240	-	650	DN125 in/out	1420	740	500	600	800	300	1200	210
UV-1002-14	24L	1850	1240	-	650	DN125 in/out	1420	740	500	600	800	400	1700	250
UV-1002-15	32L	1850	1220	-	750	DN150 in/out	1420	840	600	720	800	400	1900	350
UV-1002-16	40L	1900	1220	-	860	DN150 in/out	1410	950	700	850	1200	400	1800	440
UV-1002-17	48L	1900	1220	-	960	DN150 in/out	1410	1050	800	950	1200	400	1800	500

FT-EN-ULTRAVINDUSTR-UV-1002-XX-FL25V01