

YOUR APPLIANCES WILL THANK IT. YOU TOO.

Soft water prevents lime deposits, extending the life of pipes and appliances and avoiding costly and troublesome breakdowns.

Seda compact softener provides water that gives softness to clothes and personal hygiene. Used for cleaning, the water without lime makes sanitary ware, taps, showers and dishes are always shiny and new.



DESIGN

Seda water softener has been designed to occupy as little space as possible in your home, allowing you to place it in any available space.



ECONOMIC

Seda reduces the need for cleaning products by up to 50% and also has a low salt consumption.



PROTECTION

Softened water avoids lime scale, lengthening the life of pipes and appliances and avoiding costly and troublesome breakdowns.




CLEANING

Softness in clothing and personal hygiene. Used for cleaning, soft water makes sanitary ware, taps, showers and dishes look always shiny and new.

USER FRIENDLY

Digital programmer with multiple operating parameters.

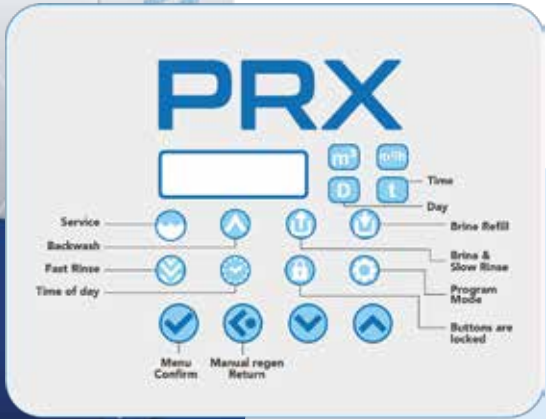

LOW CONSUMPTION, HIGH PERFORMANCE



Innovative design

Its compact size allows you to install it in a variety of spaces, even under the kitchen worktop.



Total control

Digital programmer with multiple programming possibilities which perfectly adapt to the water consumption of your home.



Efficiency and saving

Upflow compact softener of advance technology that saves salt and water.



Easy installation and maintenance



European Certificate of Conformity



EQUIPMENT MEASUREMENTS

CODE	DIMENSIONS (mm)		
	A	B	C
UF-7002-02	350	540	843

TECHNICAL SPECIFICATIONS

Closed cabinet: unit in polyethylene.
Bottle: in polyester reinforced with fibreglass (PRFV).
PRX volumetric valve.
Digital programmer with multiple operating parameters.
5 operating cycles (service, backwash, suction, salt tank filling and final resin washing).
Water supply during regeneration.
Keypad with safety locking system.
Valve configuration stored in permanent memory.
Programming in minutes.
Time of day and regeneration time programming (deferred mode).
BY-PASS included. Male 3/4" BSP inlet and outlet.
Hydraulic locking system with reinforced ceramic discs.
Possibility of forced regeneration.
Brine valve with safety float.
Residual hardness mixer.
Loaded with food grade resin of high capacity with high performance.
Working pressure: 2 to 6 Bar
Maximum temperature: 5 to 45° C
Electrical voltage: 110-230V/50-60Hz
Power: 12W

SEDA SOFTENER	
CODE	UF-7002-02
VALVE	PRX
RESINE VOLUME	24 L
WORK FLOW	0,8
SALT CONSUMPTION	2,4gr/Kg
INPUT PRESSURE	2 - 6 Bar
MAX. TEMPERATURE	45º
HARDNESS MIXER	YES
BY PASS	INCLUDED
IN-OUT CONNECTIONS	3/4"
POWER SUPPLY	230V/12V 50Hz



Seda

Hidro Water

DISTRIBUTOR:

WATER

Seda

AS SMOOTH

AS SILK



COMPACT SOFTENER
FOR WATER OF DOMESTIC USE

Hidro Water