

TECHNICAL SPECIFICATIONS

Intuitive interface: with LED displays for cartridge and membrane.

HELIA smart faucet (Check availability).

Peak flow rate: 1,6 Lpm (flow rate may vary depending on water pressure, temperature and salinity).

800GPD Membrane.

Maximum inlet TDS: 1.000 ppm.

Booster pump: High performance diaphragm.

Inlet pressure: 1 to 4 Bar.

Inlet temperature: 5 to 35° C.

Power supply: 24Vdc.

External electrical adapter: 100-240V 50/60Hz: 24Vdc.

FILTERING PROCESS

3-in-1 cartridge:
HPPC Cartridge (CA-6002-02)


Membrane:
HELIA 800 GPD RO (ME-6002-02)



DISTRIBUTOR:



RO-8002-02

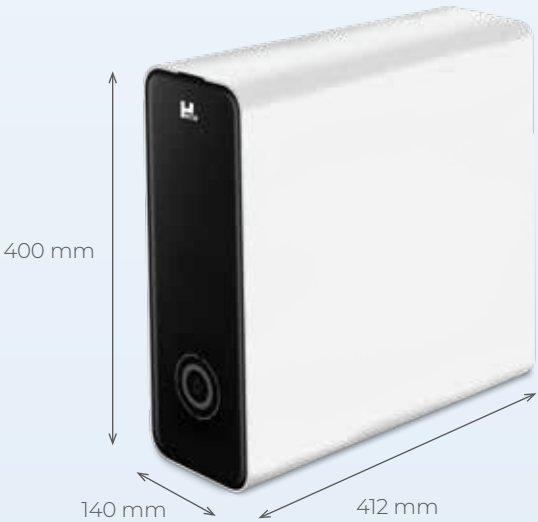

SMART DIRECT-FLOW
DOMESTIC REVERSE OSMOSIS

2:1 REJECT

Get the maximum flow rate (1,6 Lpm)
with minimum rejection 2:1

2 LITRES PRODUCED

1 LITRE REJECTED

Fill your glass in 12 seconds.



**Hidro
Water**

www.hidro-water.com

FRONT OF THE UNIT WITH LEDS

(Only on equipment with Basic tap)

Intuitive interface with led warnings for
cartridge and membrane changes and
possible leaks or lack of water.



LED HELIA SMART FAUCET PRACTICAL AND INTELLIGENT

(Check availability)

LED on the tap lights up according to
the status of the cartridges. It also
indicates the water quality according to
TDS on the display.



— Permanent blue:
Cartridge or membrane life is OK.


⚡ Flashing blue:
Cartridge or membrane life has expired.



FEWER CONNECTIONS LESS LEAKAGE

Easier to install and less
risk of water leakage.

The water-stop function
prevents leaks when
changing the cartridge
and membrane.



14 cm WIDTH

The Helia reverse osmosis
system has been
designed to take up as
little space as possible in
the kitchen.

With these
measurements, it fits
anywhere.



TURN & EXTRACT

Change cartridge
and membrane in
seconds.

Simply by turning.



HIGH-TECH AT YOUR SERVICE



Quick connection

Rotates and removes filters and
membrane with a single click.



Direct flow

No tank required.



Indicator LEDS

Information on cartridge life.



High efficiency 2:1 rejection

800 GPD membrane offering 2 litres
of water per 1 litre of rejection.



Cartridge and membrane

3 in 1 cartridge (HPPC), and membrane
800 GPD (RO).



800 GPD- Flow rate 1,6 Lpm

High performance for high flow. Fills your
water glass in 12 seconds.



Smart Flushing

Different types of automatic flushing (first
use, cumulative operation, cartridge
change, etc...).



LED HELIA smart faucet

Built-in LED for quality water control,
cartridge life and error warnings.
(Check availability)



Quick and easy maintenance

Rotate and extract.



RoHS CERTIFIED COMPLIANT