

Seda




SEDA SOFTENER

Compact automatic softener for water hardness removal by ion exchange resins.


UF Upflow regeneration TO SAVE SALT AND WATER.

- Closed cabinet unit in polyethylene.
- Bottle in polyester reinforced with fibreglass (PRFV).
- PRX volumetric valve.
- Digital programmer with multiple operating parameters.
- 5 operating cycles (service, backwash, suction, salt tank filling and final resin washing).
- Water supply during regeneration.
- Keypad with safety locking system.
- Valve configuration stored in permanent memory.
- Programming in minutes.
- Time of day and regeneration time programming (deferred mode).
- BY-PASS included. Male 3/4" BSP inlet and outlet.
- Hydraulic locking system with reinforced ceramic discs.
- Option for forced regeneration.
- Brine valve with safety float.
- Residual hardness mixer.
- Loaded with food grade resin of high capacity with high performance.
- Working pressure: 2 to 6 Bar
- Maximum temperature: 5 to 45 °C
- Power supply: 110-230V/50-60Hz.
- Power: 12W.

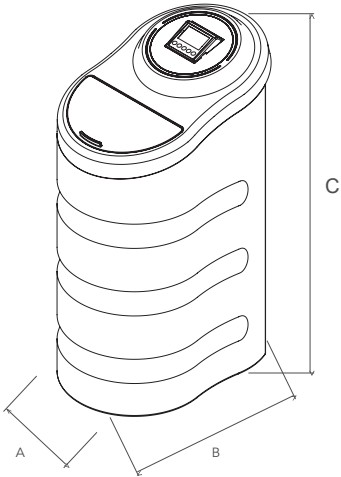

SYSTEM MEASURES

CODE	DIMENSIONS (mm)			WEIGHT (Kg)	UD/ PALLET
	A	B	C		
UF-7002-04	350	540	843	30	10



PACKAGING AND TRANSPORTATION

CODE	DIMENSIONS (mm)			WEIGHT (Kg)	LOGISTICS (unit)		
	A	B	C		Pallet	Conten. 20'	Conten. 40'
UF-7002-04	563	377	875	33,5	10	100	200



Innovative design

Its compact size allows you to install it in a variety of spaces, even under the kitchen worktop.



Total control

Digital programmer with multiple programming options which perfectly adapt to the water consumption of your home.



Efficiency and saving

Upflow compact softener of advance technology and low salt consumption



Easy installation and maintenance



European Certificate of Conformity


COMPACT SOFTENER FOR WATER OF DOMESTIC USE

Soft water prevents lime deposits, extending the life of pipes and appliances and avoiding costly and troublesome breakdowns.

Seda compact softener provides water that gives softness to clothes and personal hygiene. Used for cleaning, the water without lime makes sanitary ware, faucets, showers and dishes shiny and new.

Seda has been designed to occupy as little space as possible at home, allowing it to be placed in any available space.

PRX

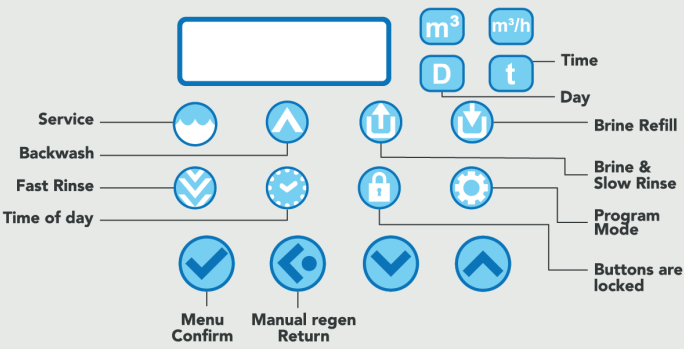

Digital programmer with multiple operating parameters

CODE	MODEL	RESIN (L)	WORK FLOW (m³/h)	SALT INTAKE (Kg)	VALVE MODEL
UF-7002-04	Seda PRX	24	0,8	2,4	PRX

FT-EN-DESCAL-SEDA-UF-7002-04-FL25V01